

SPR-90-WHT

SPR-90-WHT

The SunPower SPR-90-WHT is ideal for a wide range of off-grid applications where high battery-charging current from a small footprint is desirable. Our monocrystalline silicone solar cells combine higher voltage per cell with an extremely low voltage-temperature coefficient to enable superior battery charging performance at high operating temperature. Exceptional low-light performance and broad spectral response further enhance energy delivery in all weather conditions, year round.

Features and benefits:


- A sturdy, black anodised aluminium frame with mounting holes to match the industry norm enables easy installation on currently available mounting structures
- Over 5.1 amps of peak battery charging current
- Unique back-contact solar cells with conversion efficiency up to 21.5%
- Low voltage-temperature coefficient ensures maximum battery charging current is available even during high-temperature operation
- Exceptional low-light performance and high sensitivity to light across the entire solar spectrum maximises yearly charging performance in any weather
- Highest quality 4mm-thick high-transmission tempered glass provides enhanced stiffness and impact resistance
- Aerospace style cell interconnects with in-place strain relief provide extremely high reliability
- Advanced EVA encapsulation system with multi-layer backsheets provides excellent long-term package durability

Price £ 0.00

SunPower
SPR-90--WHT

PV-SP-MC-90

90
1038
527
46
7.4

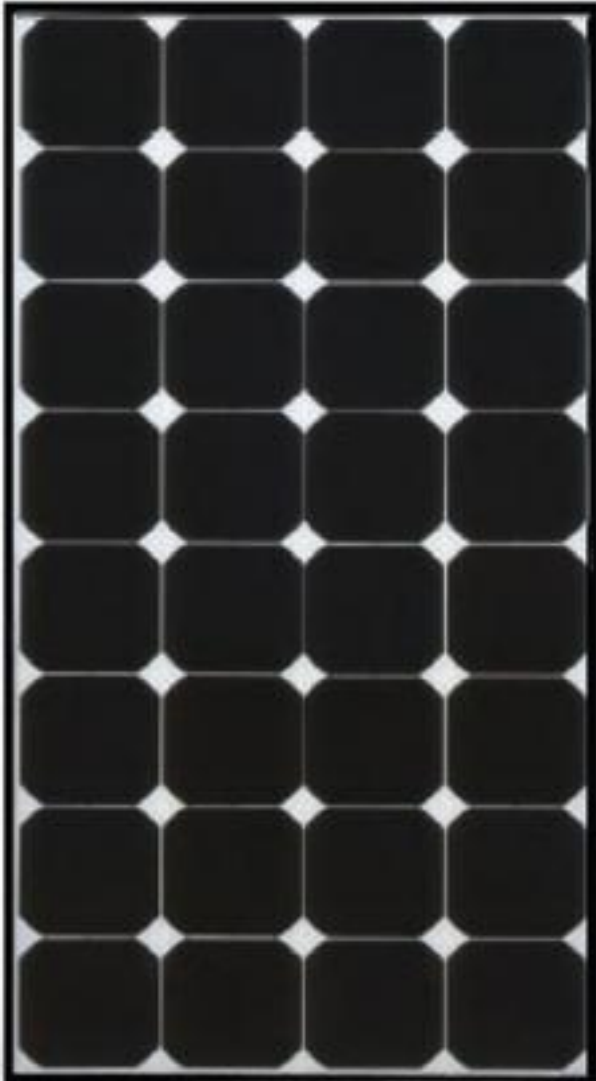

No
Yes
Changed product name
from 'SPR-90' to 'SPR-90-
WHT'
No relation